

PSO2020R2 利用 Microsoft Web Control ActiveX control 在 runtime 页面中展示网页


问题描述:

利用 Microsoft Web Control ActiveX control 在 runtime 页面中展示网页


解决方案:

步骤如下:


1. 在图形编辑器中放置 Microsoft Web Brower 控件

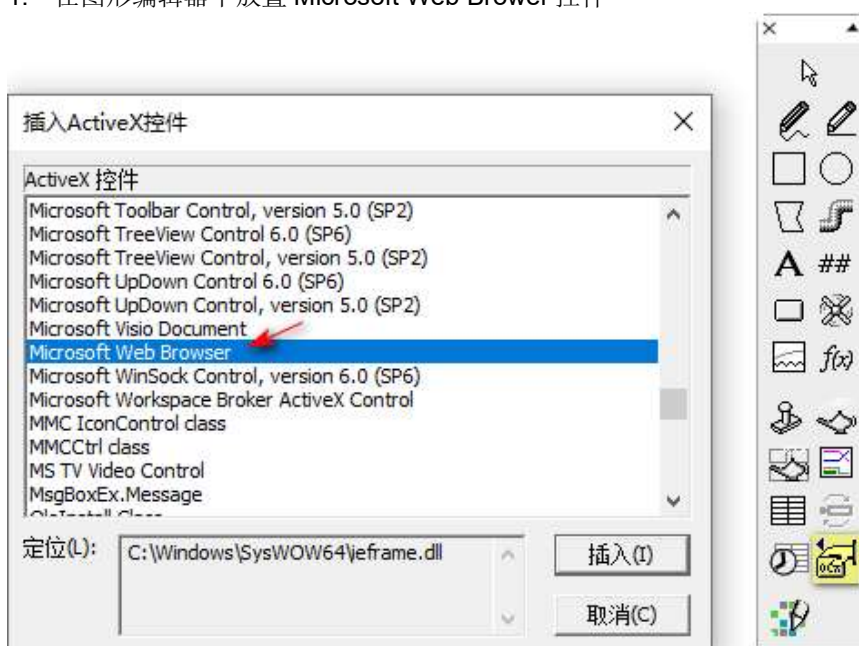


2. 获取其对象 AN，如下例为 507

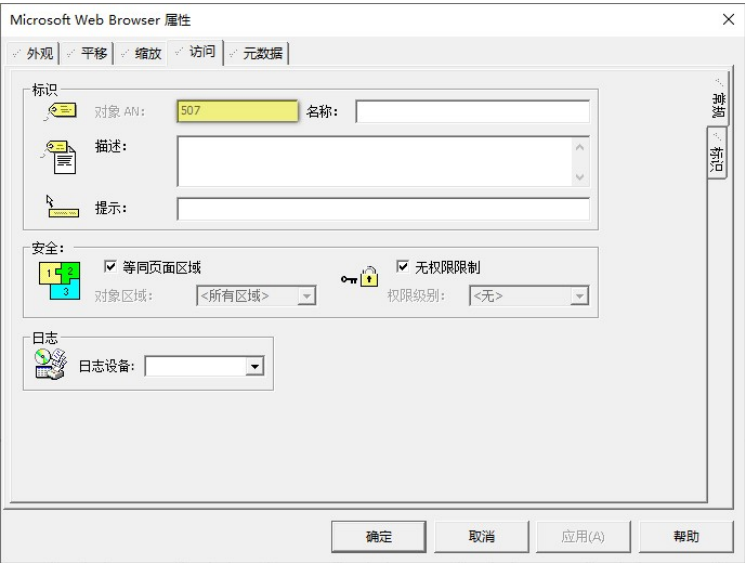

3. 在页面空白处右键选择页面属性，在事件中选择“进入页面时”，进入页面时命令栏内输入如下内容，确定即可。
`_objectcallmethod(objectbyname("AN507"),"Navigate2","https://www.baidu.com/")`

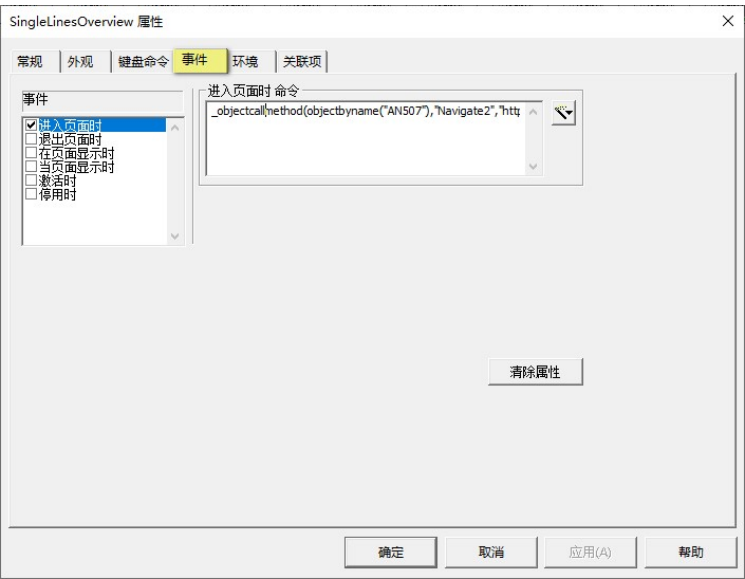

4. 运行测试

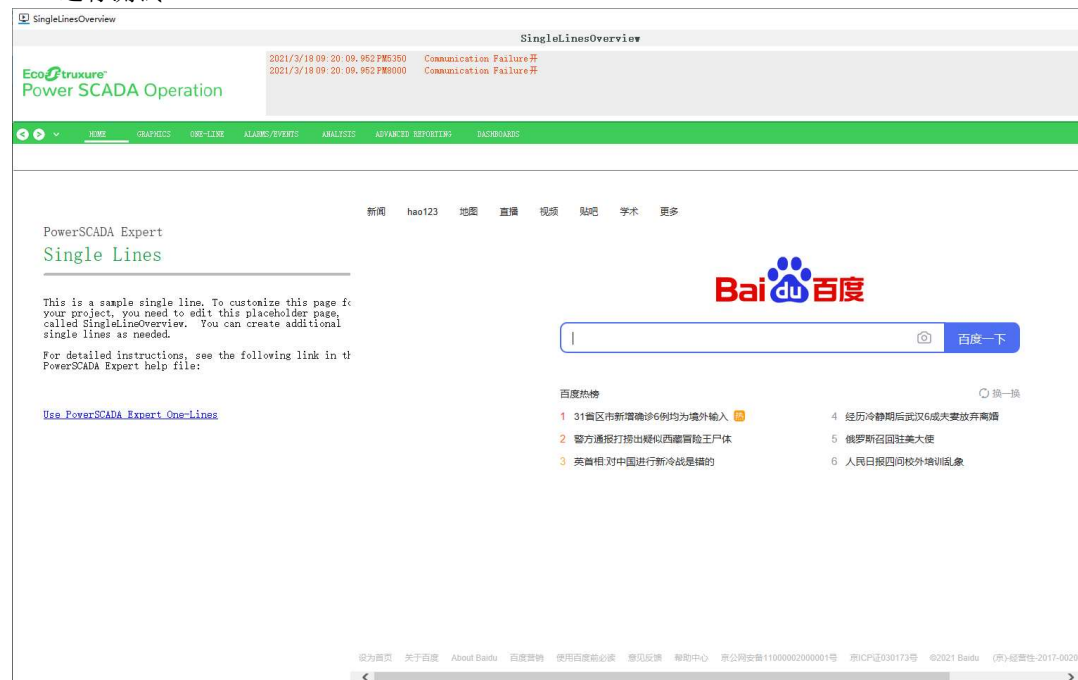

此方法的说明如下：

ObjectCallMethod

Calls a specific method for an ActiveX object. (See the documentation for your ActiveX object for details on methods and properties.)

Note: The parameter list passed to the control can only have Cicode variables or variable tags; it cannot use values returned directly from a function because an ActiveX control may modify parameters passed to it.

For example:

```
//Calculate a value and pass to ActiveX control
_ObjectCallMethod(hControl, "DoSomething", CalcValue());
```

is not allowed because the return value of a function cannot be modified. The following should be used instead:

```
INT nMyValue;  
//Calculate Value  
nMyValue = CalcValue();  
//Pass Value to ActiveX control  
_ObjectCallMethod(hControl, "DoSomething", nMyValue);
```

Syntax

_ObjectCallMethod(*hObject*, *sMethod*, *vParameters*)

hObject:

The handle for the object (as returned by the ObjectByName() function).

sMethod:

The name of the method.

vParameters:

A variable length parameter list of method arguments. The variables will be passed however you enter them, and will then be coerced into appropriate automation types. Likewise, any values modified by the automation call will be written back - with appropriate coercion - into the passed Cicode variable.

Return Value

The return value from the method - if successful, otherwise an [error code](#) is returned.