

PSO9.0 如何配置基本报告

问题描述:

如何创建 VIP 服务

解决方案:

步骤如下:

1. 添加参数

打开 Citect.ini:

`\ProgramData\Schneider Electric\PowerSCADA Expert\v9.0\Config\citect.ini`

或 Citect Graphics Builer-->Tools-->Computer Setup Editor

或 PowerSCADA Studio-->Projects-->Home-->Setup Editor

`[CtAPI] Remote=1`


`[Applications] PSEHostname=主机名`

2. 配置单点登陆 Single Sign-On (SSO)

打开 Application Config Utility - Security - Single Sign-On

- 选择 Application (basic reporting)/Timeout
- 添加用户

选择 Basic Report, SSO User / Password : PSO user / password

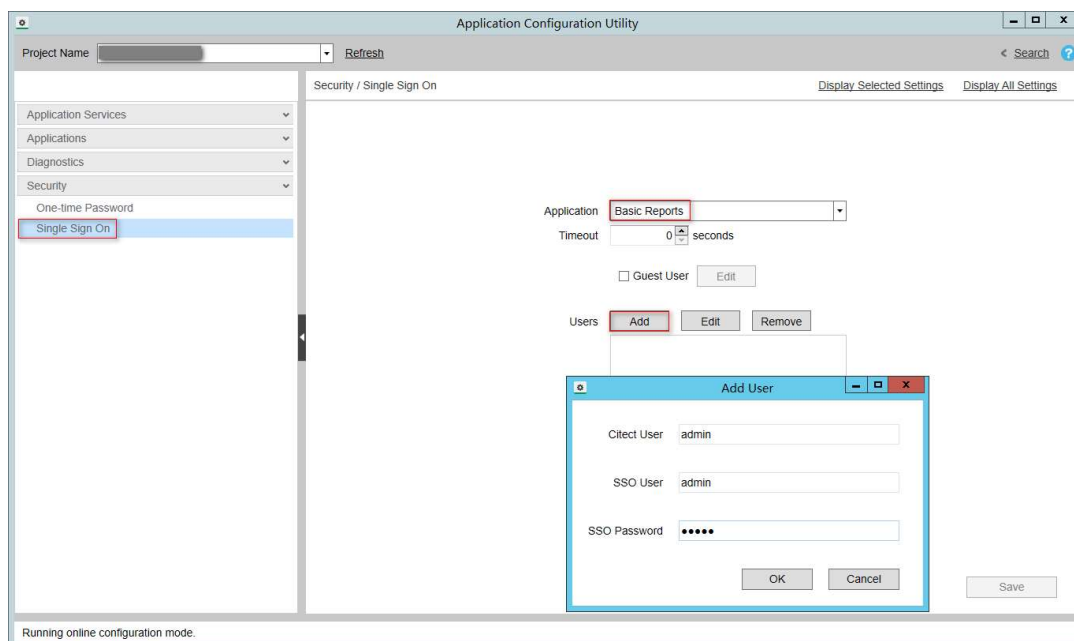

3. ACU 中测试 - 保存


Citect I/O Server Address: 服务器名

Citect User Name: PSO 用户名

Citect Password: PSO 密码

Test - Save

Restart SE CoreServiceHost service

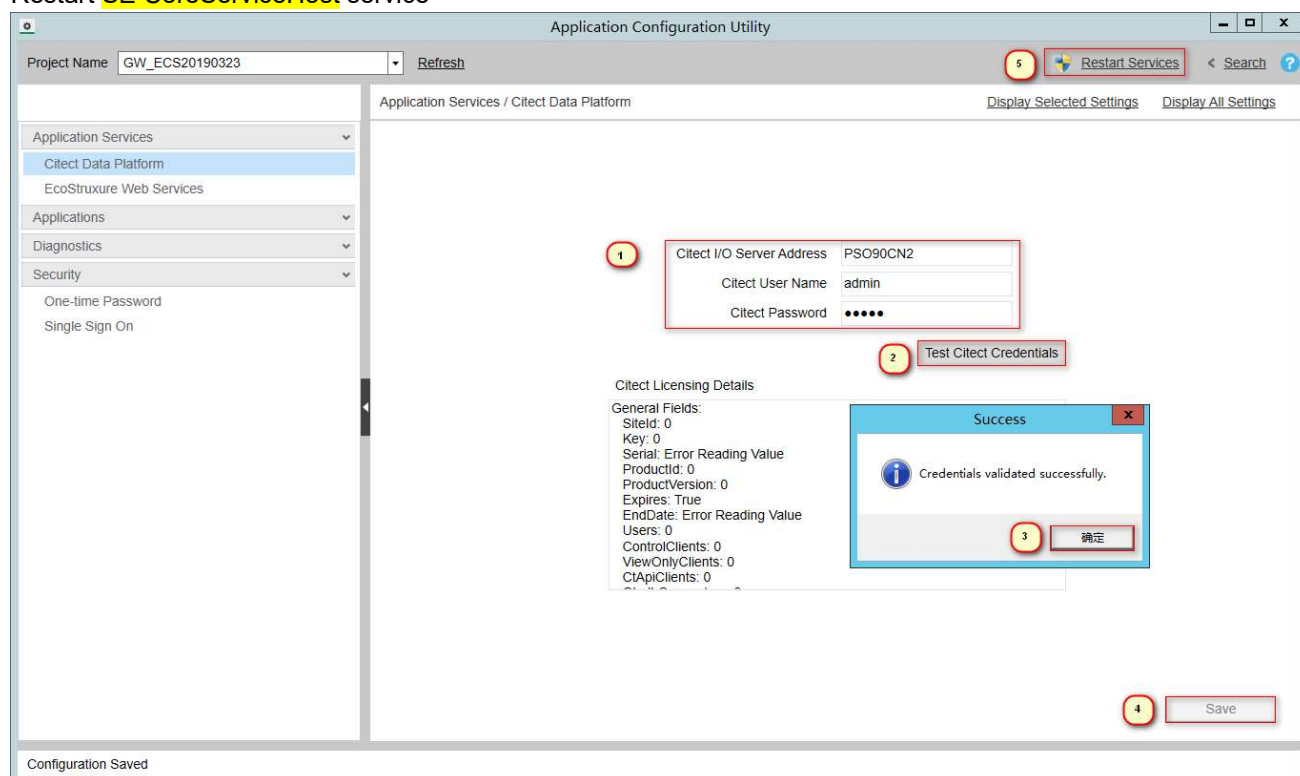

检查登陆用户的角色的 **RPC** 是否为 TRUE

Security						
Roles Users						
Save Discard Copy Paste Delete Row(s) Export All Import All						
Row	Role Name	Windows Group	Privileges	Allow RPC	Allow Exec	Manage Users
1	Supervisor		1..8	TRUE	FALSE	TRUE
2	Operator		1..4	TRUE	FALSE	FALSE
3	Controller		1..6	TRUE	FALSE	FALSE
4	User		1..2	TRUE	FALSE	FALSE
5	Role0		0	TRUE	FALSE	FALSE

4. 添加菜单，用实际 IP 地址代替函数中的参数 ip address

```

PLS_ReportDsp("ip address","TabularReport","", "Tabular Report")
PLS_ReportDsp("ip address","TrendReport","", "Trend Usage Report")
PLS_ReportDsp("ip address","SingleDeviceReport","", "Single Device Report")
PLS_ReportDsp("ip address","MultiDeviceReport","", "Multi Device Report")

```